


## 25% UNIVERSAL AIRFLOW PANEL

The Global IFS 25% open perforated panel is the best in the industry for data centers, equipment rooms, and some industrial applications when creating a cold aisle to minimize overheating of servers. Able to withstand a 1250-lb. concentrated load, this durable steel panel delivers 19% more air volume than competitive equivalent panels. With its universal design, the panel fits any access floor system. And it's made in the USA.



### FEATURES

- All steel construction
- 25% open area nominal
- Available with adjustable damper or no damper to control the volume of airflow
- Withstand concentrated loads up to 1250 lbs.
- Available with high pressure laminate or ESD vinyl surface finish
- Fits adjacent to all Global IFS panels

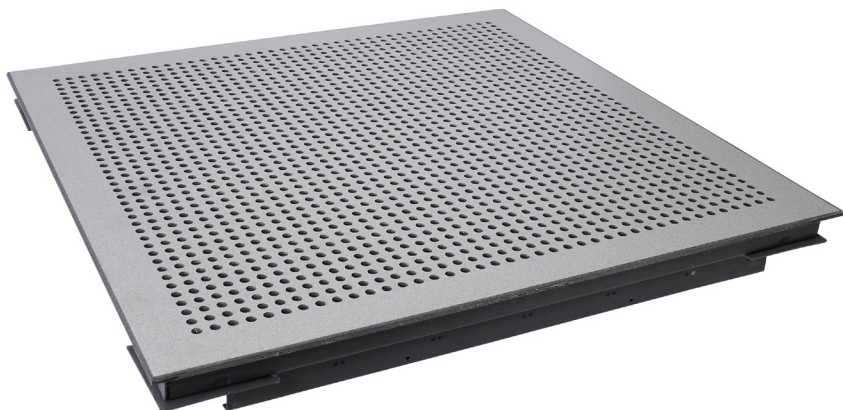


# 25% UNIVERSAL

## SYSTEM DRAWING

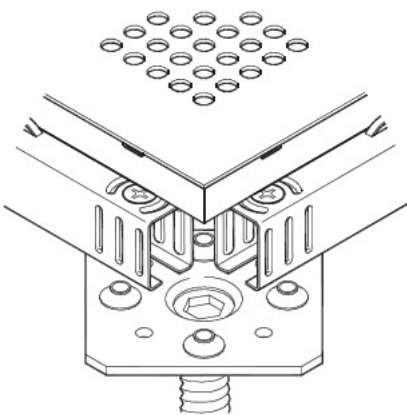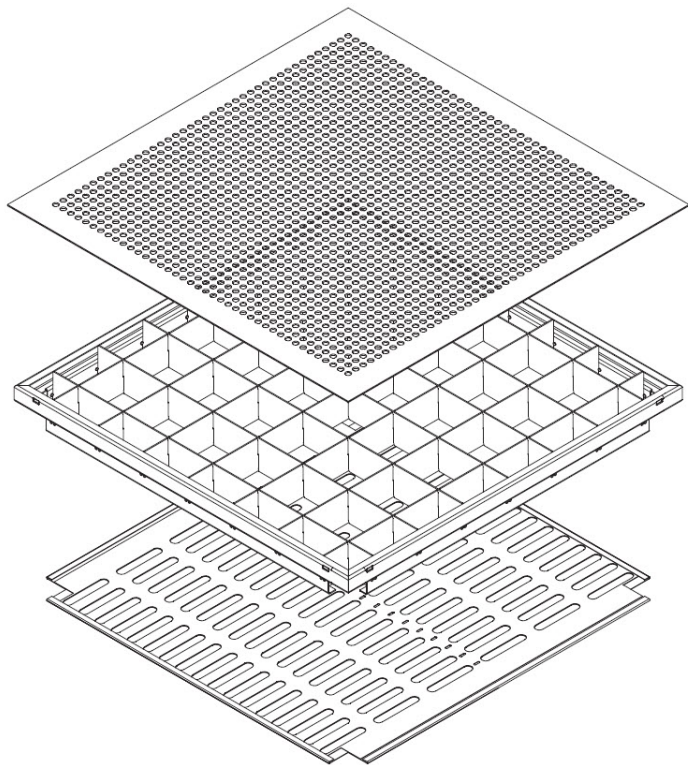

25% UNIVERSAL DESIGN AIRFLOW PANEL

## PERFORMANCE DATA

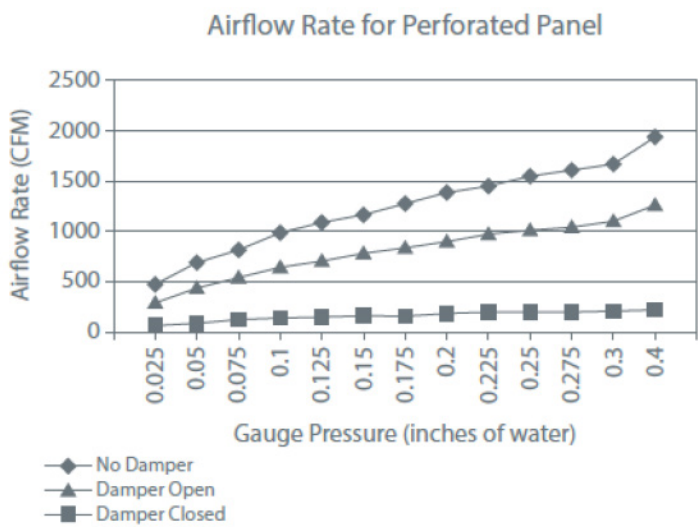

Gauge Pressure (inches of water)	No Damper	Damper Open	Damper Closed
0.025	460	294	58
0.05	701	436	87
0.075	824	550	110
0.1	991	646	125
0.125	1093	712	135
0.15	1182	780	149
0.175	1283	839	159
0.2	1393	901	170
0.225	1461	965	177
0.25	1553	1015	185
0.275	1625	1049	191
0.3	1687	1106	195
0.4	1947	1275	216